

SHELF

Version
Remote under-roof motor 950
m³/h

Designer

Collection
Elements

EAN code
8034122365299

FEATURES

- Touch control
- Dynamic Light (2700K - 5600K)
- Extendable and retractable tempered smoked glass visor
- Motor sold separately
- Multi-Air technology
- Emptied liquid collector
- Anti-condensation no-drop filter in technopolymer

OPTIONAL ACCESSORIES

- KACL.770#41F**
Remote under-roof 1100 m3/h
Brushless
- KACL.786#41F**
Outdoor extractor fan 1000 m3/h
- KACL.798#41F**
Remote under-roof motor 950
m3/h

TECHNICAL FEATURES

- Installation type**
Wall
- Dimensions**
120 cm
- Finishing**
Aluminium finishing black matt
Smoked tempered glass
Matte black painted steel
- Type of control**
Touch control
- Speed**
3 + boost
- Lighting**
Strip Led - 2700 K / 5600 K



Photograph is for information purposes only
It may not correspond to the selected version.

PACKAGING:WEIGHTS AND VOLUMES

SHELF Gross weight

26.8 kg

Net weight

23.1 kg

Volumes

0.19 m³

Packaging size

Length

1295 mm

Height

320 mm

Depth

465 mm

REMOTE MOTOR Remote
under-roof motor 950 m³/h

Gross weight

10 kg

Net weight

9 kg

Volumes

0.06 m³

Packaging size

Length

435 mm

Height

340 mm

Depth

385 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption

20 W

Voltage


220-240V

Frequency


50-60Hz

ENERGY CLASS


B




Hood module 120 cm




Side view with front panel in
aluminium




Side view without front panel
(customisable version)




Module 60 cm




Module 90 cm



Plant basin for shelf 60 cm



Plant basin for shelf 90 cm



Tablet holder (included in the hood module)

SHELF


Version
Remote under-roof motor 950
m³/h

Designer

Collection
Elements

EAN code
8034122365299

ENERGY LABEL

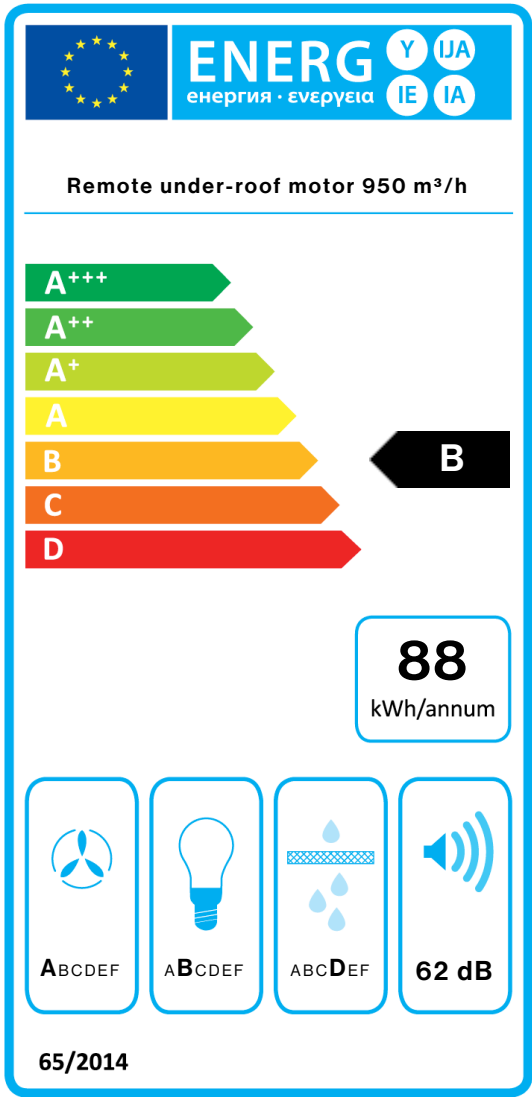

PF		
S	Falmec Spa	
M	Remote under-roof motor 950 m³/h	
AEC	87,5	kWh/a
EEC	B	
FDE	28,4	
FDEC	A	
LE	23,5	
LEC	B	
GFE	70,0	
GFEC	D	
Qmin	340,0	m³/h
Qmax	542,0	m³/h
Qboost	684,0	m³/h
SPEmin	49	dBa
SPEmax	62	dBa
SPEboost	65	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEl	61,1	
Qbep	377,0	m³/h
Pbep	436	Pa
Qboost	684,0	m³/h
Wbep	161,0	W
WL	12,00	W
Emiddle	282	lux
Lwa-SPEmax	62	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEl_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point /

Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.