

VIRGOLA TOUCH NRS

Version

Built-in - 90 cm - Inox - 800 m³/h

Collection

Silence - NRS

EAN code

8034122368108



Photograph is for information purposes only
It may not correspond to the selected version.

FEATURES

Glass panel
NRS technology for a quieter kitchen
Touch control
Metallic grease filter, removable and washable
Dynamic Light (2700K - 5600K)
Carbon.Zeo Microtech filter (optional)

OPTIONAL ACCESSORIES

KACL.1039
Carbon.Zeo Microtech filter
KACL.400
Silent / Conveyer NRS
KCVJN.19#I
Chimney kit Virgola Touch NRS H
315 + extension H 295

TECHNICAL FEATURES



Installation type
Built-in
Dimensions
90 cm
Finishing
Scotch brite stainless steel
Motor
800 m³/h
Type of control
Touch control
Speed
3 + boost
Lighting
Strip Led 5,8 W - 2700 K / 5600 K
Minimum distance
Gas hob: 52 cm
Electric hob: 52 cm

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
27 kg
Net weight
21 kg
Volumes
0.31 m³
Packaging size
Length
1035 mm
Height
410 mm
Depth
740 mm

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz
ENERGY CLASS
A



VIRGOLA TOUCH NRS

Version

Built-in - 90 cm - Inox - 800 m3/h


Collection

Silence - NRS

EAN code

8034122368108

ENERGY LABEL

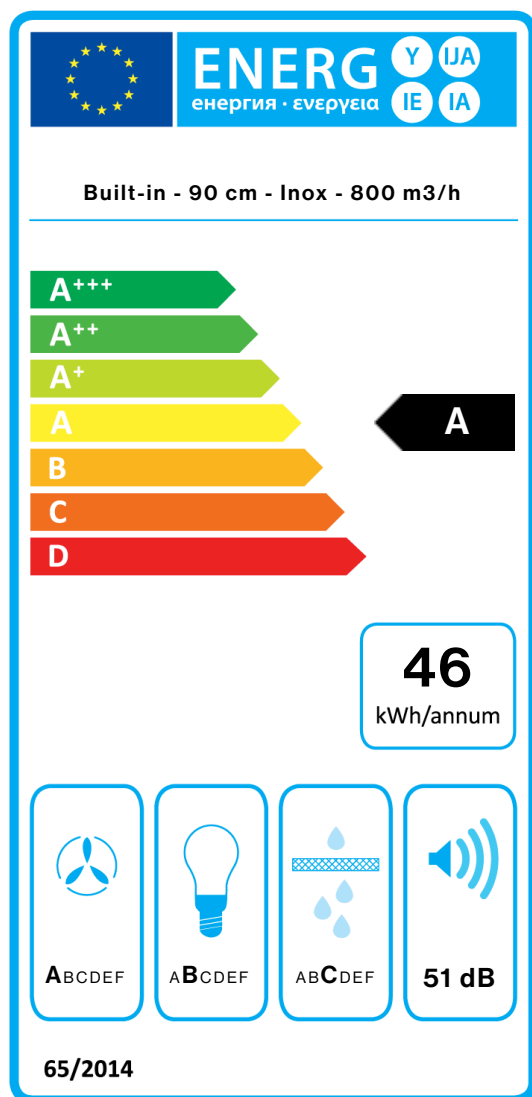

| PF | | |
|-------------------|------------------------------------|-------------------|
| S | Falmec Spa | |
| M | Built-in - 90 cm - Inox - 800 m3/h | |
| AEC | 46,0 | kWh/a |
| EEC | A | |
| FDE | 31,7 | |
| FDEC | A | |
| LE | 21,2 | |
| LEC | B | |
| GFE | 84,0 | |
| GFEC | C | |
| Qmin | 299,0 | m ³ /h |
| Qmax | 521,0 | m ³ /h |
| Qboost | 636,0 | m ³ /h |
| SPEmin | 39 | dBa |
| SPEmax | 51 | dBa |
| SPEboost | 58 | dBa |
| PO | - | W |
| PS | 0,28 | W |
| PI | | |
| F | 0.9 | |
| EEl | 52,1 | |
| Qbep | 382,0 | m ³ /h |
| Pbep | 379 | Pa |
| Qboost | 636,0 | m ³ /h |
| Wbep | 127,0 | W |
| WL | 5,80 | W |
| Emiddle | 123 | lux |
| Lwa-SPEmax | 51 | dBa |

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). **PI_Additional information according to 66/2014** F_Time increase factor / EEI_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximum air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa-SPEmax_Sound pressure level at the highest speed.