

GRUPPO INCASSO NO-DROP

Version
Gruppo Incasso No-Drop 90
cm - 800 m3/h

Collection
Design

EAN code
8034122362281

FEATURES

Scotch brite stainless steel (AISI 304)
Electronic control
Optional charcoal filter
Optional remote control
Oil collector
Dynamic LED Light (2700K - 5600K)
No-Drop patented anti-condensation system

OPTIONAL ACCESSORIES

KACL.770#41F
Remote under-roof 1100 m3/h
Brushless
KACL.782#49F
Slim motor 800 m3/h
KACL.786#41F
Outdoor extractor fan 1000 m3/h
KACL.796#4AF
Outdoor extractor fan 1500 m3/h
KACL.797#4AF
Remote under-roof motor 1300 m3/h
103050091
Round charcoal filter Ø170 mm - Type 6

TECHNICAL FEATURES


Installation type
Built-in
Finishing
Scotch brite stainless steel (AISI 304)
Motor
500 CFM
Type of control
Electronic control
Speed settings
4
Lighting
Led 4x1,2 W - 2700 K / 5600 K
Charcoal filter
Round charcoal filter Ø170 mm - Type 6 (included)
Minimum distance
Gas hob: 25 in
Electric hob: 21 in

PACKAGING:WEIGHTS AND VOLUMES

Gross weight
34 lbs
Net weight
27 lbs
Volumes
6 ft³
Packaging size
Length
37 in
Height
15 in
Depth
18 in

CONSUMPTION AND CONNECTION FEATURES

Maximum consumption
280 W
Voltage
220-240V
Frequency
50-60Hz
Plug type
Shuko
ENERGY CLASS
B




GRUPPO INCASSO NO-DROP

Version
Gruppo Incasso No-Drop 90
cm - 800 m3/h

Collection
Design

EAN code
8034122362281

ENERGY LABEL

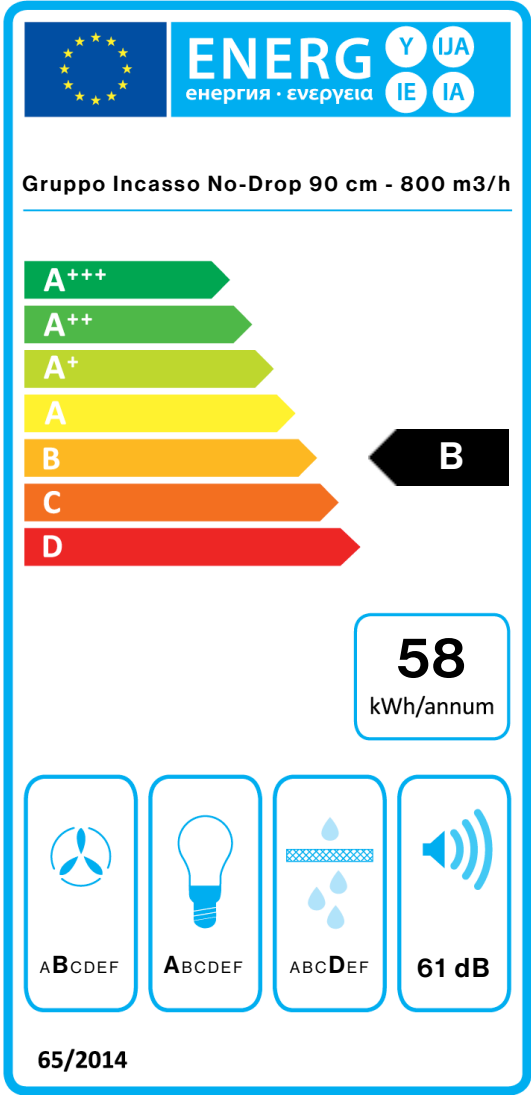

PF		
S	Falmec Spa	
M	Gruppo Incasso No-Drop 90 cm - 800 m3/h	
AEC	58,1	kWh/a
EEC	B	
FDE	26,4	
FDEC	B	
LE	31,4	
LEC	A	
GFE	70,0	
GFEC	D	
Qmin	250,0	m³/h
Qmax	480,0	m³/h
Qboost	620,0	m³/h
SPEmin	49	dBa
SPEmax	61	dBa
SPEboost	66	dBa
PO	-	W
PS	0,48	W
PI		
F	1	
EEL	59,2	
Qbep	364,0	m³/h
Pbep	371	Pa
Qboost	620,0	m³/h
Wbep	142,0	W
WL	8,60	W
Emiddle	270	lex
Lwa-SPEmax	61	dBa

PF_Product fiche according to 65/2014 S_Supplier name / M_Model identification / AEC_Annual Energy Consumption (AEC hood) / EEC_Energy Efficiency class / FDE_Fluid Dynamic Efficiency (FDE hood) / FDEC_Fluid Dynamic Efficiency class / LE_Lighting Efficiency (LE hood) / LEC_Lighting Efficiency class / GFE_Grease Filtering Efficiency / GFEC_Grease Filtering Efficiency class / Qmin_Air flow (in m³/h) at min speed in normal use / Qmax_Air flow (in m³/h) at max speed in normal use / Qboost_Air flow (in m³/h) at intensive or boost setting (max air-flow) / SPEmin_Airborne acoustical A-weighted sound power emissions at min speed in normal use / SPEmax_Airborne acoustical A-weighted sound power emissions at max speed in normal use / SPEboost_Airborne acoustical A-weighted sound power emissions (in dB) at intensive or boost setting / PO_Power consumption in off mode (Po) / Ps_Power consumption in stand by mode (Ps). PI_Additional information according to 66/2014 F_Time increase factor / EEL_Energy Efficiency Index / Qbep_Measured air flow rate at best efficiency point / Pbep_Measured air pressure at best efficiency point / Qboost_Maximun air flow / Wbep_Measured electric power input at best efficiency point / WL_Nominal power of the lighting system / Emiddle_Average illumination of the lighting system on the cooking surface / Lwa=SPEmax_Sound pressure level at the highest speed.